




# PRECISION REROLLED STAINLESS STEEL, NICKEL & COBALT STRIP

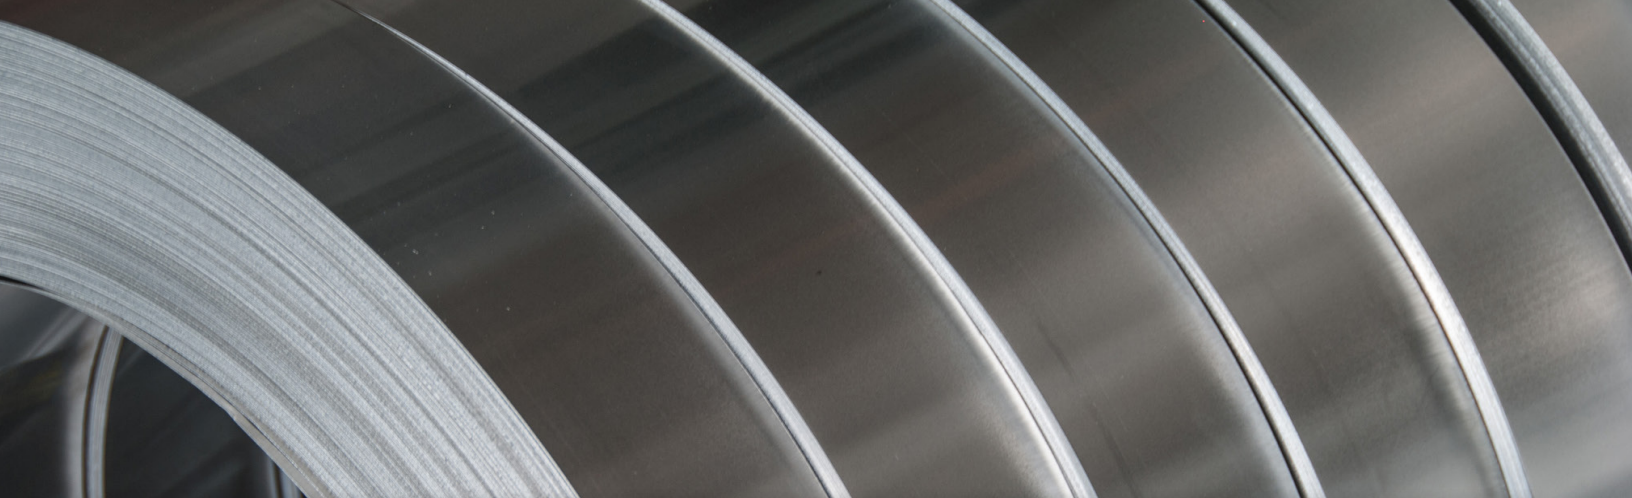

## REROLL CAPABILITIES

- Extreme Precision Tolerances
- Fully Certified AMS and ASTM Specs
- DFARS Compliant Material



## REROLL EQUIPMENT

- Sendzimir Cold Reversing Mill
- Strip Cleaning Line
- Bright Annealing Furnace
- Slitting Line



## INDUSTRIES SERVED

- Aerospace
- Power Generation
- Automotive
- Photo-Etching
- Springs
- Electronics
- Fasteners
- Washers
- Strapping
- Filters
- Gaskets
- Hose Clamps
- Appliances
- Refrigeration

## PRECISION REROLLED STRIP SOLUTIONS

United Performance Metals now offers precision thin gauge strip in stainless steel, nickel alloys, and cobalt to your exacting specifications. By leveraging our people, products, and FIRSTCUT+® Processing Services, our new rerolling mill is the latest example of how we are expanding to meet our customer's needs.



888.282.3292

sales@upmet.com

www.upmet.com

# PRECISION REROLLED STRIP

<b>STAINLESS STEEL</b>	<b>301</b>	<b>302/304</b>	<b>304/L DDQ</b>	<b>305 DDQ</b>	<b>316/316L</b>	<b>317/317L</b>	<b>321</b>	<b>347</b>
<b>NICKEL ALLOYS</b>	<b>201</b>	<b>600</b>	<b>625</b>	<b>718</b>	<b>X750</b>	<b>ALLOY X</b>	<b>C276</b>	<b>WASPALLOY</b>
<b>COBALT ALLOYS</b>	<b>L605</b>							

<b>THICKNESS RANGE</b>	.0008" - .015"
<b>WIDTH RANGE</b>	.200" – 12.00" #3 Slit Edge 12.50" Mill Edge
<b>CERTIFICATIONS</b>	Full chemical and mechanical certification provided to ASTM and/or AMS specifications DFARS/Domestic available as needed
<b>BRIGHT ANNEALING</b>	Controlled hydrogen atmosphere annealing for a brighter finish
<b>ALL TEMPER</b>	1/8, 1/4, 1/2, 3/4, Full Hard, Spring Temper available in 301, 302 and 304 Can also be processed to customer specific property requirements
<b>SURFACE FINISHES</b>	1BA & TR (Temper Rolled), 2B
<b>SURFACE ROUGHNESS</b>	4 – 12 RA or as required
<b>SURFACE CLEANING</b>	Cleaning as thin as .0008"
<b>FLATNESS AS ROLLED</b>	3% of thickness. Tension leveling for thin gauges is available upon request
<b>CAMBER</b>	As narrow as 1/2" wide: 1/4" maximum in any 8 foot length Less than 1/2" wide: 1/2" maximum in any 8 foot length
<b>COIL ID</b>	6", 8", 16"
<b>LOT SIZE</b>	50 lbs. minimum

Please contact us for additional grades and sizes at [sales@upmet.com](mailto:sales@upmet.com)